



1509 Series

Diversified access ways
Suitable for indoor use

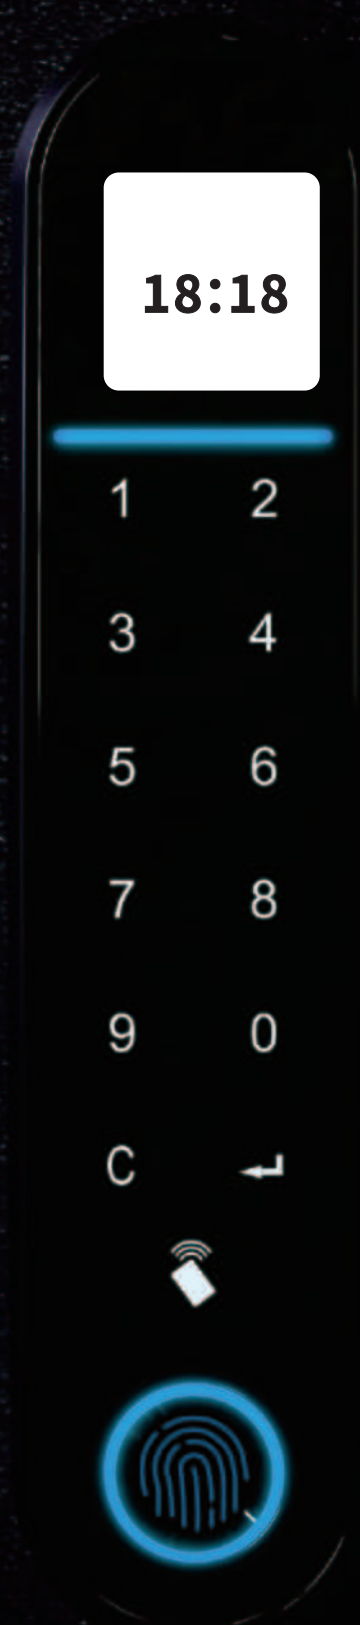

Dimensions

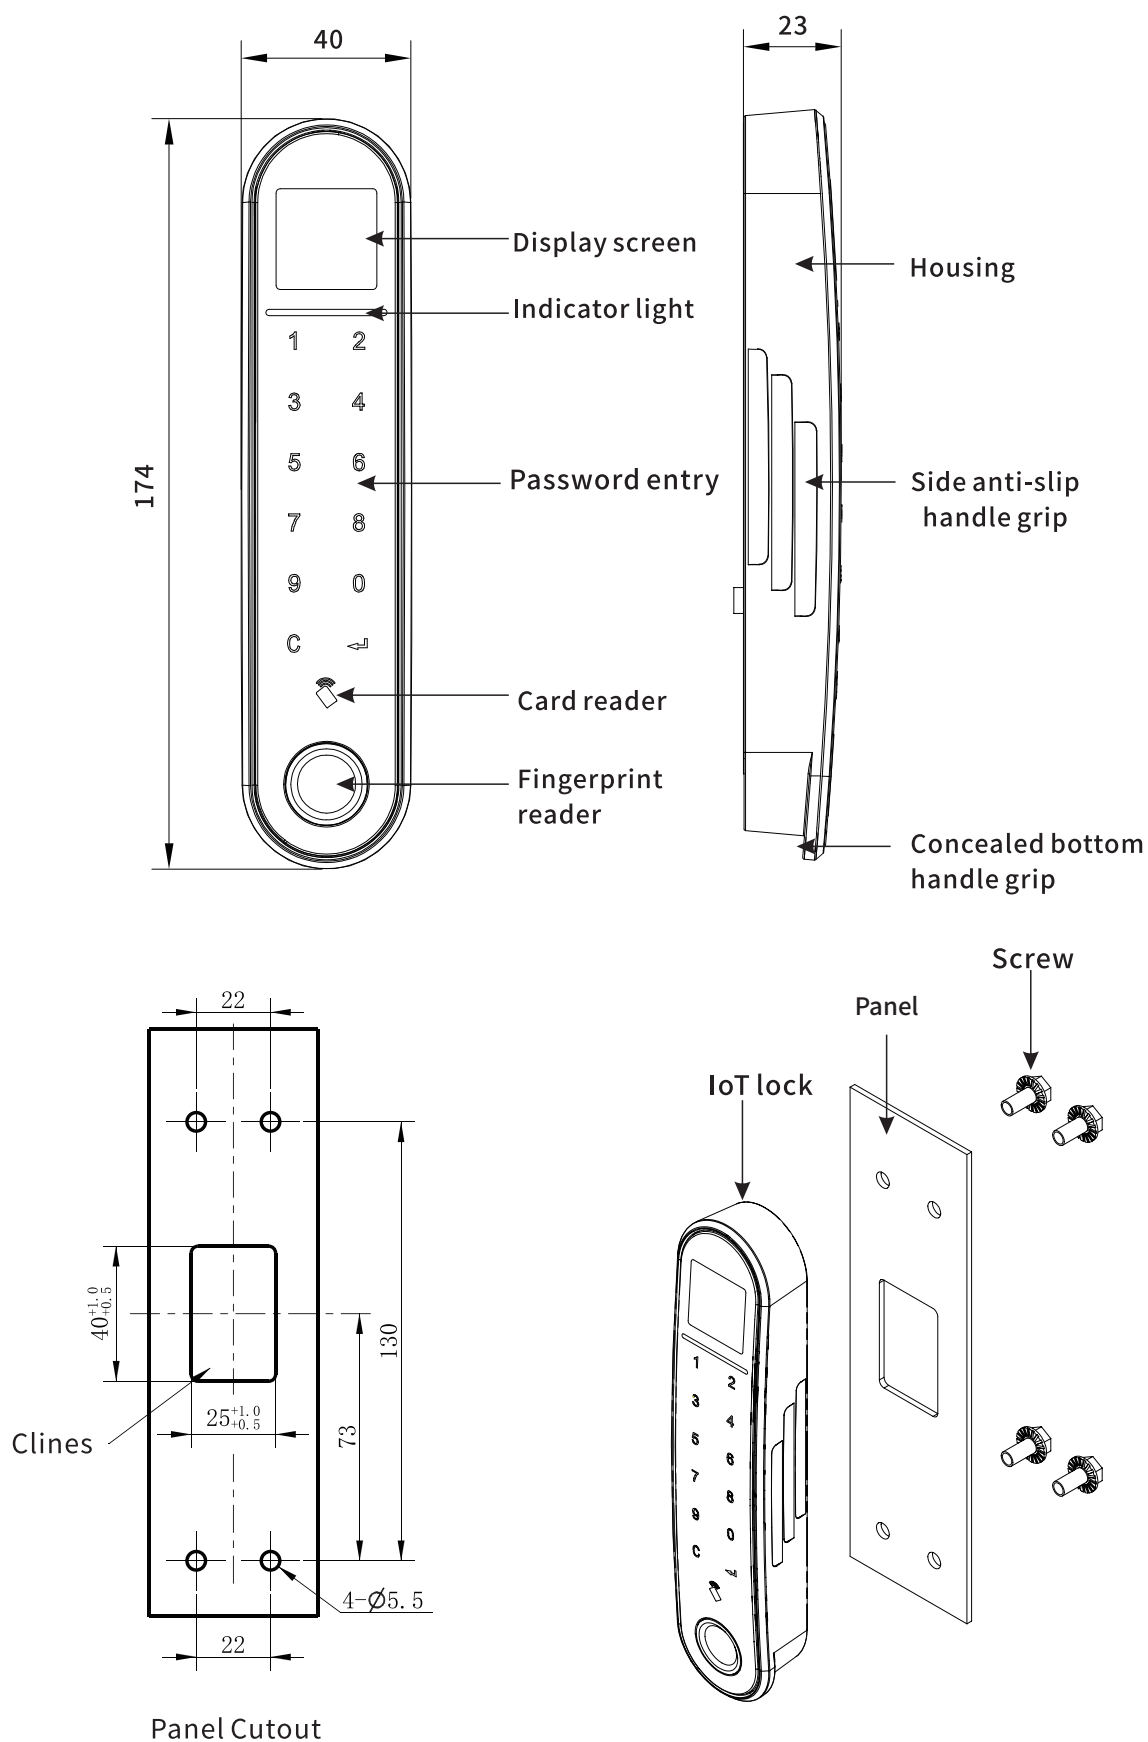



Features

Industry Status

Some standards in the data center industry require that the cabinet door automatically open after power failure. Most of the existing cabinet locking solutions are implemented by access control device with handle, which is neither aesthetics nor convenient to install.

1509 IoT lock came into being

The 1509 IoT lock perfectly integrates the function of the handle into the lock and adopts a modular design to meet the needs of different customers.

Besides,1509 also possesses the following features:

- Integrated Handle
- Integrated Access Unit
- Support Remote Assistance
- Diversified Access Ways

Easy Installation

In the past, it was necessary to install handles, access control device, access unit, gas springs, and magnetic locks. Now only 1509 IoT lock, gas springs and magnetic locks are required.

NO.	Item	Parameter
1	Dimensions	174mm X 40mm X 23mm
2	Operating voltage	DC 12V
3	Standby current	(Without magnetic lock) <80MA (With magnetic lock) <1A
4	Rated current	1A
5	IP rating	IP40
6	Access ways	Remote Control (485) + Keypad Password + IC Card (Optional) + Fingerprint (Optional)
7	Communication method	RS485
8	Storage capacity	Password: 200 groups; Card: 200 groups; Fingerprint: 99 groups
9	Material & Finish	Zinc alloy, Black textured powder coated

Part Number		
NO.	Access ways	
1	Remote Control + Keypad Password + IC card	1509-126-20.SC
2	Remote Control + Keypad Password + fingerprint	1509-146-20.SC
3	Remote Control + Keypad Password + IC card + fingerprint	1509-1246-20.SC